


<u>PLAN</u>

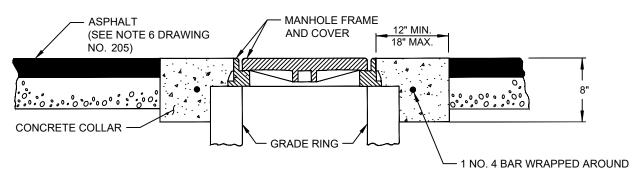

SECTION A-A

NOTES

- 1. CONCRETE COLLAR, FRAME, AND COVER SHALL BE CONSTRUCTED 1/8" BELOW THE ADJACENT SURFACE, ±1/16".
- 2. CONCRETE COLLAR NOT REQUIRED IN UNINCORPORATED CLARK COUNTY RESIDENTIAL STREETS LESS THAN 80' R/W WIDTH.
- 3. IF MANHOLE IS MORE THAN 1-1/2" ABOVE OR BELOW THE ADJACENT ROADWAY SURFACE, MANHOLE SHALL BE ADJUSTED TO GRADE BY UTILITY OWNER.
- 4. IF MANHOLE IS MORE THAN 1/4" ABOVE OR BELOW THE ADJACENT ROADWAY SURFACE IN A BICYCLE LANE, MANHOLE SHALL BE ADJUSTED TO GRADE BY UTILITY OWNER.
- 5. WHEN INSTALLED WITHIN PEDESTRIAN ACCESS ROUTES, TOP OF MANHOLE COVERS SHALL HAVE NO VERTICAL SURFACE DISCONTINUITIES GREATER THAN 1/4" WITH ADJACENT SURFACE, HAVE NO GAPS GREATER THAN 1/2" REGARDLESS OF CONSTRUCTION TOLERANCES, AND BE FIRM, STABLE, AND SLIP RESISTANT.

		AGENCY APPRO	VED			L			
SPECIFICATION REFERENCE		UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA							
501	CONCRETE								
505	REINFORCING STEEL	SUPPLEMENTAL DRAWING							
		CONCRETE COLLAR AROU MANHOLES					JND		
		DATE 06-10-21 [DWG. NO.	408.S1					