
STORMWATER INLET CONCRETE STAMP

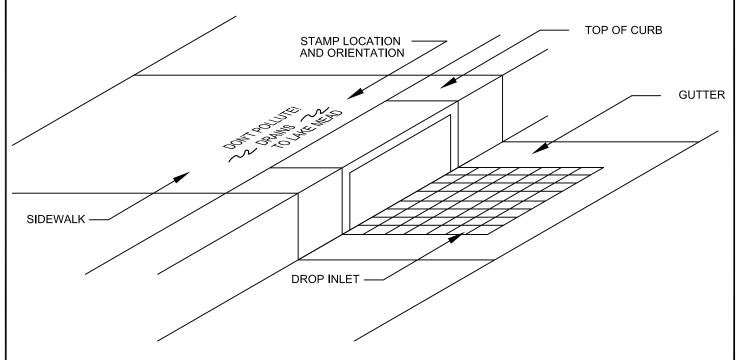


NOTES:

- 1. MESSAGE OR SYMBOL SHALL BE AS SHOWN ON THE DRAWING OR ON THE VERTICAL CURB NEXT TO THE DROP INLET OR AS APPROVED BY THE APPROPRIATE CITY OR COUNTY ENGINEER.
- 2. LETTERS SHALL BE 1-7/16" IN HEIGHT. THE MESSAGE SHALL BE CENTERED ON THE BACK OF THE INLET OR ON THE TOP OF CURB.
- CONCRETE SHALL BE STAMPED IN SUCH A WAY AS TO PROVIDE FOR A CLEAR AND LEGIBLE IMAGE.
 (APPROXIMATE DEPTH OF 1/4").
- 4. ALL STAMPS SHALL BE APPROVED BY THE CITY OR COUNTY ENGINEER BEFORE BEING USED.
- 5. STAMP MAY BE PERMANENTLY CAST INTO CAST IRON FRAME OR PRE-CAST CONCRETE PORTIONS OF INLET.
- 6. WHERE RETROFITTING IS REQUIRED, AN EPOXIED PLACARD BEARING THE MESSAGE AND SYMBOL APPROVED BY THE APPROPRIATE CITY OR COUNTY ENGINEER SHALL BE PERMANENTLY AFFIXED ON THE TOP OF THE ADJACENT CURB.
- 7. THIS STANDARD IS REQUIRED IN THE LAS VEGAS VALLEY IN WHICH AREA WATER DRAINS TO LAKE MEAD.

SPECIFICATION REFERENCE	UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA
	STORM WATER QUALITY MANAGEMENT STAMP AND SIGN DETAIL
	DATE 12-09-10 DWG. NO. 421 SHEET 1 OF 3

STAMP MESSAGES AND SYMBOLS

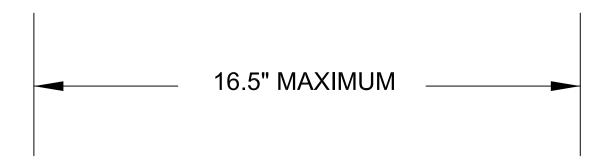



SPECIFICATION REFERENCE	UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA
	STORM WATER QUALITY MANAGEMENT STAMP AND SIGN DETAIL
	DATE 12-09-10 DWG. NO. 421 SHEET 2 OF 3



4" PLACARD - COLORS = BLUE AND GREEN

THIS EPOXY PLACARD MESSAGE AND SYMBOL HAS BEEN APPROVED BY THE APPROPRIATE CITY OR COUNTY ENGINEER. ANY OTHER EQUIVALENT MESSAGE AND SYMBOL DESIGNS WILL REQUIRE PRIOR APPROVAL OF THE APPROPRIATE CITY OR COUNTY BEFORE INSTALLATION. THE PLACARD MATERIAL SHALL BE EITHER POLYCARBONATE OR METAL AND THE FINISH SHALL BE UV AND ABRASION RESISTANT.

STORM DRAIN MARKER

SPECIFICATION REFERENCE	UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA
	STORM WATER QUALITY MANAGEMENT STAMP AND SIGN DETAIL
	DATE 12-09-10 DWG. NO. 421 SHEET 3 OF 3